

# PUNTO

## SIDE OPENING TECHNOPOLYMER HOUSING

REVISION 1038



### MAIN FEATURES

Indoor / Outdoor

Side opening, easy camera servicing

Weatherproof standard IP66/IP67

Different mounting options: standard bracket or cable management bracket or P&T

Integrated heater

### DESCRIPTION

Stylish technopolymer housing, PUNTO has been designed to optimize the spaces. Its dimensions make it suitable for a variety of combinations of cameras and lenses. Thanks to the side opening, the accessibility to the camera, lens and all its connections is made far easier.

The front is designed to offer protection from UV rays and atmospheric agents. The weatherproof feature is ensured by the neoprene-rubber gasket and by the two cable glands.

PUNTO proposes various mounting options: wall or ceiling brackets (feedthrough and non-feedthrough) or Pan & Tilt head.

Sunshield and camera power supply are available as accessories.



PUNTO



PUNTO + SUNSHIELD



PUNTO + WBOVA2

### AVAILABLE MODELS

Code	Only housing	With WBOVA2 bracket	115/230Vac heater	12Vdc/24Vac heater
HOT39D1A000	•		•	
HOT39D2A000	•			•
HOT39D1A085		•	•	
HOT39D2A085		•		•

**PUNTO**

**TECHNICAL DATA**

**GENERAL**

Entirely constructed from technopolymer  
 RAL9002 Colour  
 Stainless steel external screws  
 Supplied with instruction manual, desiccant bag, accessories for camera and lens mounting

**MECHANICAL**

2xM16 cable glands  
 Glass window (WxH): 60/95x63mm (2.4/3.7x2.5in)  
 Internal usable area (WxH): 70x70mm (2.7x2.7in)  
 Internal usable length with and without accessories: 250mm (9.8in)

**ELECTRICAL**

Heater Ton 15°C±3°C (59°F±5.4°F) Toff 22°C±3°C (71.6°F±5.4°F)

- IN 12Vdc, 1.6Amax
- IN 24Vac, 50/60Hz 1.5Amax
- IN 115Vac, 50/60Hz 0.5Amax
- IN 230Vac, 50/60Hz 0.25Amax

**ACCESSORIES**

OHOTS Sunshield  
 OHOTPS1 Wide range camera power supply IN 100-240Vac - OUT 12Vdc, 1A  
 OHOTPS2 Camera power supply IN 230Vac - OUT 24Vac, 400mA

**BRACKETS AND ADAPTORS**


WBJA Wall bracket with ball joint  
 WBOVA2 Wall bracket with internal cable channel

**ENVIRONMENT**

Indoor / Outdoor  
 Operating temperature with heater: -20°C / +60°C (-4°F / +140°F)  
 Very good resistance to the following chemical agents: basics, alcohols, gasses, hydrocarbon  
 Good resistance: organic and inorganic acids, oils  
 Low resistance: solvents

**CERTIFICATIONS**

CE EN61000-6-3, EN60950-1, EN50130-4  
 IP66/IP67 EN60529

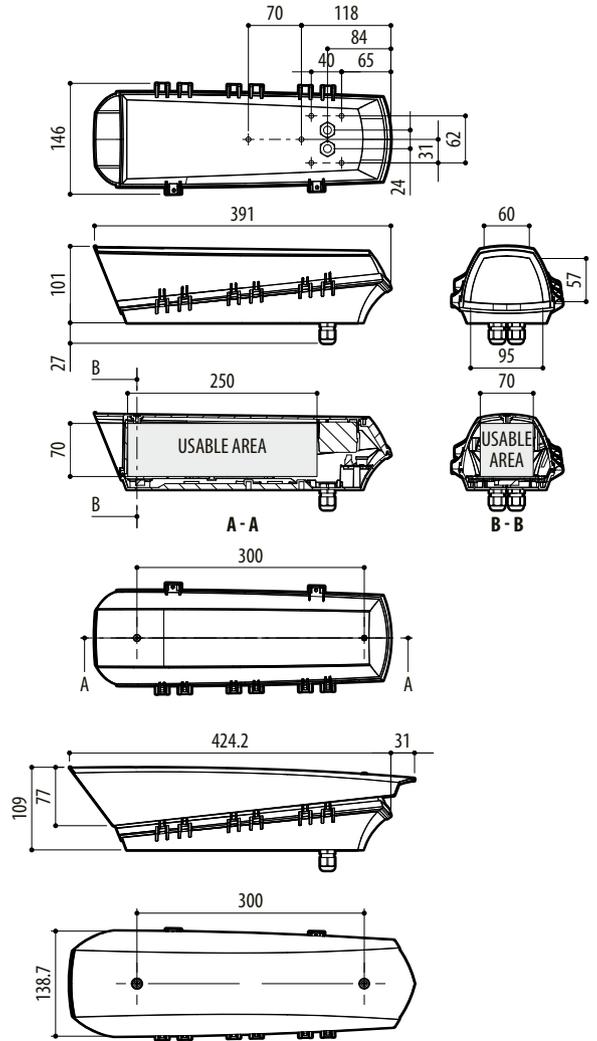

PUNTO

mm 1:10

PACKAGE							
Code	Unit weight		Package weight		Package dimensions (WxHxL)		Master carton unit
	kg	lb	kg	lb	cm	in	
HOT39D1A000	0.6	1.3	0.8	1.8	41.5x11.5x16.5	16.3x4.5x6.5	12
HOT39D1A085	1.2	2.6	1.5	3.3	41.5x20x15.5	16.3x7.9x6.1	8
OHOTS	0.3	0.7	0.5	1.1	48.5x10x16.5	19.1x3.9x6.5	-